


พุกเหล็กธรรมดา




Size	แรงดึง	แรงเฉือน	A	D	L	H	กล่องละ	ลังละ
	Tension kn	Shear kn					Pcs/Box	Pcs/Ctn
3/16	11	12	3/16	6.5	40	28	400	4,000
1/4	25	20	1/4	8.0	50	38	200	2,000
5/16	40	33	5/16	10.0	65	45	100	1,000
3/8	7.8	41	3/8	12.0	70	50	75	750
1/2	10.0	6.5	1/2	16.0	95	65	30	300
5/8	12.0	12.5	5/8	20.0	110	85	20	200
3/4	14.5	20.0	3/4	25.0	160	120	-	80

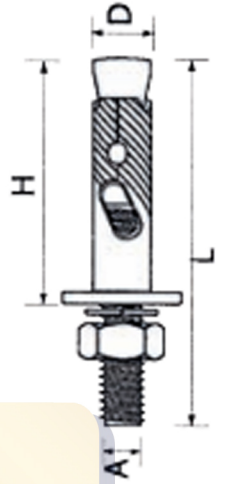

พุกตะกั่วธรรมดา

Size	แรงดึง	แรงเฉือน	A	D	L	กล่องละ	ลังละ
	Tension kn	Shear kn				Pcs/Box	Pcs/Ctn
1/4	2.2	3.2	1/4	1/2	35	100	-
5/16	2.3	4.2	5/16	5/8	41	100	-
3/8	4.5	5.2	3/8	3/4	51	50	-
1/2	5.4	10.8	1/2	7/8	64	25	-
5/8	7.0	15.5	5/8	1	70	15	300
3/4	11.0	19.0	3/4	1 1/4	100	10	100



พุกเชื่อม

Size	d	ความลึกรูเจาะ	กล่องละ	ลังละ
		Depth of Hole	Pcs/Box	Pcs/Ctn
HAS-1040	10	30	100	600
HAS-1045	10	30	100	600
HAS-1050	10	40	100	600
HAS-1055	10	40	100	600
HAS-1060	10	40	100	600



พุก GT

Size	ลำตัว	ยาว	เกลียว	สว่าน	ความแข็ง	รูลึก	กล่องละ	ลังละ
	mm.	mm.	ยาว	mm.	คอนกรีต Kgf	mm.	Pcs/Box	Pcs/Ctn
3/8 GT-3030	12.0	30.0	12.0	12.5	950.0	30.0	100	800

